



STANDARD, REINFORCED EYE

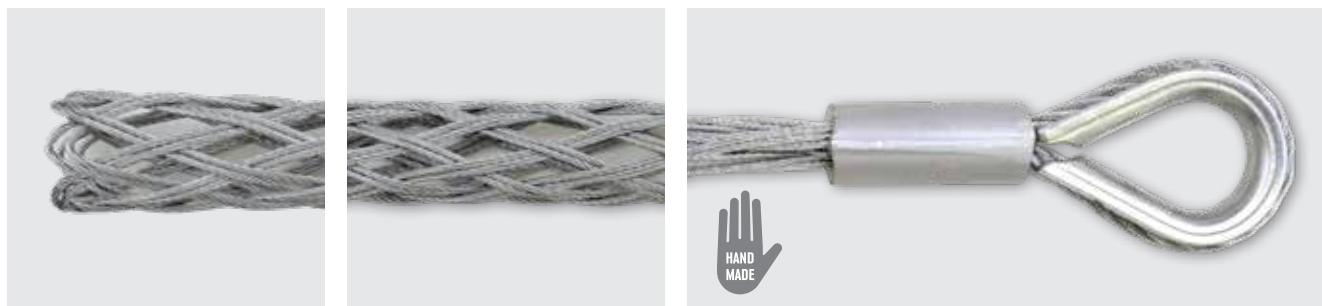

[EN] Cable pulling grip with single eye and thimble [D] Kabelziehstrumpf mit einer Kausche [E] Malla tiracables con un lazo y dedal
[F] Chaussette tire-câbles à boucle simple avec cosse coeur [I] Calza tiracavi con un'asola e redancia

art.	ø mm	L mm	L ₁ mm				n.			kg
JST112/15	10-15	1350	1250	3.000 daN	5	1,50 mm		7	14 x 24	0,33
JST112/20	15-20	1350	1250	3.000 daN	5	1,50 mm		7	14 x 24	0,36
JST112/30	20-30	1350	1250	3.000 daN	5	1,50 mm		7	14 x 24	0,40
JST112/40	30-40	1350	1250	3.500 daN	6	1,50 mm		7	14 x 24	0,44
JST112/50	40-50	1350	1250	3.500 daN	6	1,50 mm		7	14 x 24	0,48
JST112/60	50-60	1350	1250	3.500 daN	6	1,50 mm		7	14 x 24	0,52
JST112/70	60-70	1350	1250	4.100 daN	7	1,50 mm		7	15 x 29	0,56
JST112/80	60-80	1350	1250	4.700 daN	8	1,50 mm		7	15 x 29	0,58
JST112/80	70-80	1350	1250	4.700 daN	8	1,50 mm		7	15 x 29	0,59
JST112/90	80-90	1350	1250	4.700 daN	8	1,50 mm		7	15 x 29	0,62
JST112/100	80-100	1350	1250	9.400 daN	8	2,00 mm		7	15 x 29	0,66
JT112/100	90-100	1350	1250	9.400 daN	8	2,00 mm		7	18 x 32	1,00
JST112/110	90-110	1350	1250	9.400 daN	8	2,00 mm		7	18 x 32	1,00
JT112/110	100-110	1350	1250	11.000 daN	10	2,00 mm		7	18 x 32	1,05
JST112/120	100-120	1350	1250	11.000 daN	10	2,00 mm		7	18 x 32	1,10
JT112/120	110-120	1350	1250	11.000 daN	10	2,00 mm	7	18 x 32	1,16	
JST112/130	120-130	1400	1250	11.000 daN	10	2,00 mm	7	21 x 38	1,21	
JST112/150	120-150	1400	1250	11.000 daN	10	2,00 mm	7	21 x 38	1,26	
JST112/140	130-140	1400	1250	14.000 daN	12	2,00 mm	7	21 x 38	1,30	
JT112/150	140-150	1400	1250	14.000 daN	12	2,00 mm	7	21 x 38	1,35	

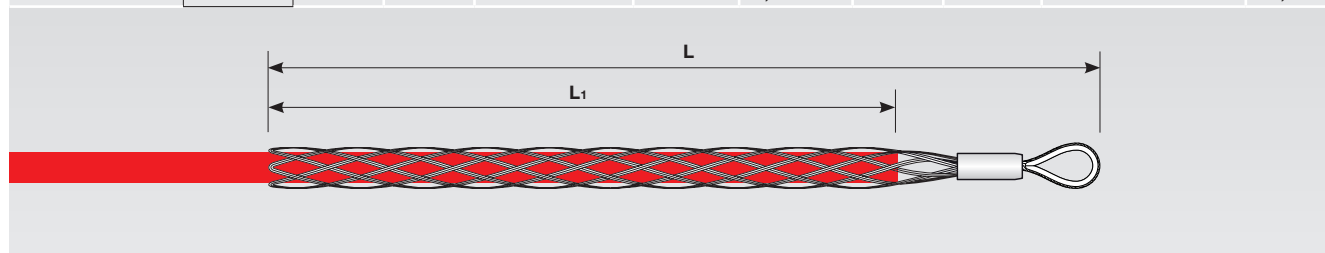

Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Soggetto a variazioni tecniche senza preavviso. Sujet à des modifications techniques sans préavis. Soggetto a variazioni tecniche senza preavviso.