



STANDARD, LONG

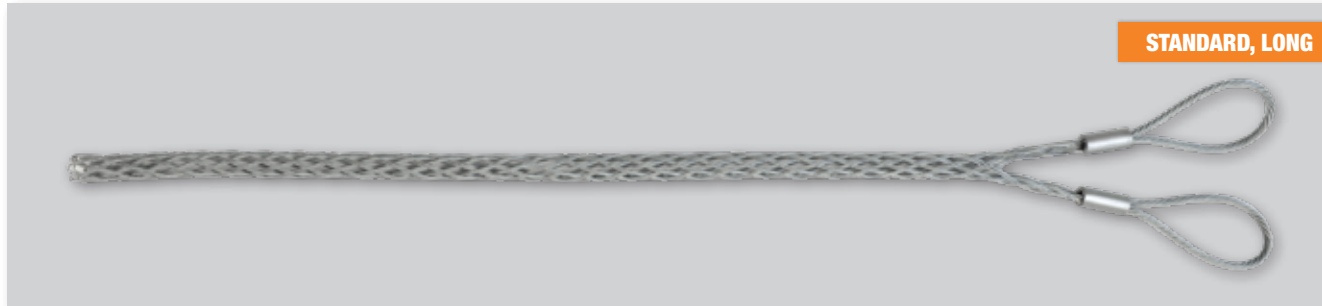

[EN] Cable pulling grip with two eyes without thimble [D] Kabelziehstrumpf mit zwei Schlaufen [E] Malla tiracables con doble lazo sin dedales
[F] Chaussette tire-câbles à boucle double sans cosse coeur [I] Calza tiracavi con due asole senza redancia

art.	ø mm	L mm	L ₁ mm				n.		[mm]	kg
JST215/15A	10-15	1750	1500	3.000 daN	4	1,50 mm		7	6 x 100	0,36
JST215/20A	15-20	1750	1500	3.000 daN	5	1,50 mm		7	6 x 100	0,39
JST215/30A	20-30	1750	1500	3.000 daN	5	1,50 mm		7	6 x 100	0,42
JST215/40A	30-40	1800	1500	3.500 daN	6	1,50 mm		7	6 x 150	0,47
JST215/50A	40-50	1800	1500	3.500 daN	6	1,50 mm		7	6 x 150	0,51
JST215/60A	50-60	1800	1500	3.500 daN	6	1,50 mm		7	6 x 150	0,54
JST215/70A	60-70	1800	1500	4.100 daN	7	1,50 mm		7	8 x 150	0,58
JST215/080A	60-80	1800	1500	4.700 daN	8	1,50 mm		7	8 x 150	0,60
JST215/80A	70-80	1800	1500	4.700 daN	8	1,50 mm		7	8 x 150	0,61
JST215/90A	80-90	1800	1500	4.700 daN	8	1,50 mm		7	8 x 150	0,64
JST215/100A	80-100	1800	1500	9.400 daN	8	2,00 mm		7	8 x 150	0,68
JT215/100A	90-100	1800	1500	9.400 daN	8	2,00 mm		7	8 x 150	0,91
JST215/110A	90-110	1850	1500	9.400 daN	8	2,00 mm		7	10 x 200	1,00
JT215/110A	100-110	1850	1500	11.000 daN	10	2,00 mm		7	10 x 200	1,04
JST215/120A	100-120	1850	1500	11.000 daN	10	2,00 mm		7	10 x 200	1,09
JT215/120A	110-120	1850	1500	11.000 daN	10	2,00 mm	7	10 x 200	1,15	
JST215/130A	120-130	1850	1500	11.000 daN	10	2,00 mm	7	10 x 200	1,21	
JST215/150A	120-150	1850	1500	11.000 daN	10	2,00 mm	7	10 x 200	1,25	
JST215/140A	130-140	1900	1500	14.000 daN	12	2,00 mm	7	10 x 200	1,30	
JT215/150A	140-150	1900	1500	14.000 daN	12	2,00 mm	7	10 x 200	1,35	

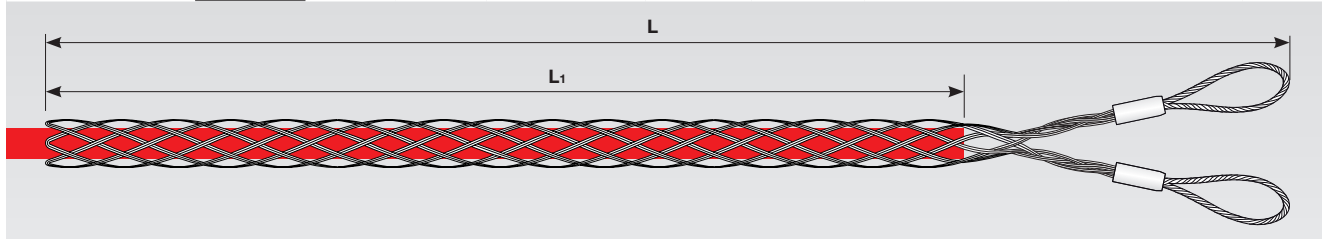

Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Soggetto a variazioni tecniche senza preavviso. Sujet à des modifications techniques sans préavis. Soggetto a variazioni tecniche senza preavviso.