





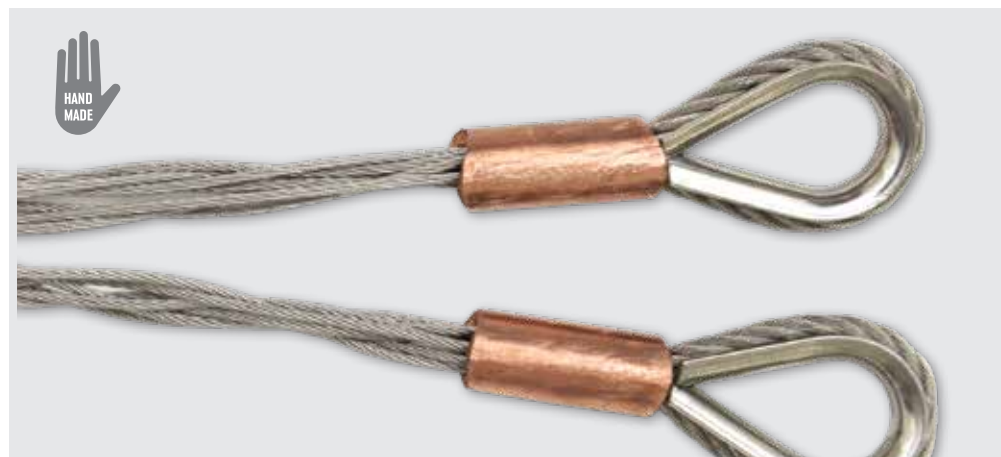
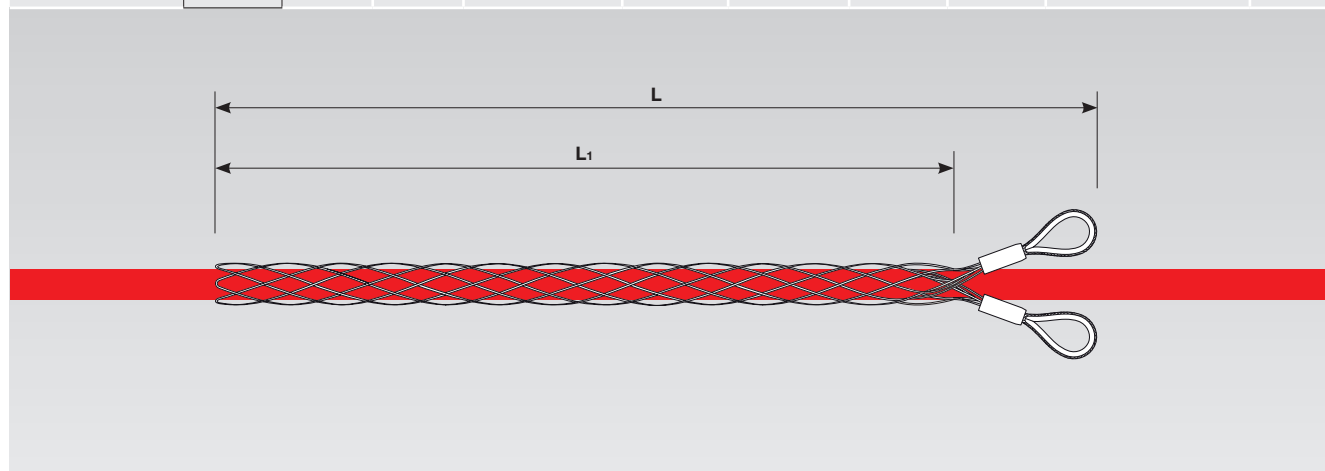




[EN] Cable suspension grip with two eyes and thimble made of stainless steel AISI-316, with copper sleeve **[D]** Kabelmontagestrümpf mit zwei Kauschen, aus Edelstahl AISI-316, mit Kupferklemmen **[E]** Malla tiracables portadores realizado con doble lazo y dedales, fabricado en acero inoxidable AISI-316, con manga de cobre **[F]** Chaussette tire-câbles porteurs, à boucle double et cosse cœur, construction en acier inoxydable AISI-316, manchon en cuivre **[I]** Calza di sospensione con due asole e redancia, realizzate in acciaio INOX AISI-316, manicotto in rame

art.	ø mm	L mm	L ₁ mm				n.			kg
									[mm] H x D	
JZ-KM7100IX	10-15	800	600	1.100 daN	5	1,50 mm		7	9 x 14	0,22
JZ-KM7150IX	16-20	800	600	1.100 daN	5	1,50 mm		7	9 x 14	0,24
JZ-KM7200IX	21-27	800	600	1.500 daN	7	1,50 mm		7	12 x 18	0,27
JZ-KM7300IX	28-35	800	600	1.500 daN	7	1,50 mm		7	12 x 18	0,29
JZ-KM7400IX	36-45	800	600	1.800 daN	8	1,50 mm		7	12 x 18	0,31
JZ-KM7500IX	46-55	800	600	3.800 daN	8	2,00 mm		7	16 x 23	0,50
JZ-KM7600IX	56-65	800	600	3.800 daN	8	2,00 mm		7	16 x 23	0,55



Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Sujeto a variaciones técnicas sin previo aviso. Soggetto a variazioni tecniche senza preavviso.