




[EN] Cable suspension grip with single eye, construction by non-conductive nylon wire [D] Kabelmontagestrumpf mit einer Schlaufe, geflochten aus Nylon mit nicht leitender Eigenschaft [E] Malla tiracables portadores con un lazo, construcción en hilos de nylon no conductor [F] Chaussette tiracables porteurs à boucle simple, construction en nylon non-conducteur [I] Calza di sospensione con un'asola, costruzione in nylon non conduttore

art.	ø mm	L mm	L <sub>1</sub> mm				n.		g
JLKM0812NN	8-12	500	350	500 daN	4	1,00 mm		4 x 100	12
JLKM1215NN	12-15	500	350	800 daN	5	1,00 mm		4 x 100	14
JLKM1518NN	15-18	550	380	800 daN	5	1,00 mm		4 x 100	17
JLKM1825NN	18-25	580	400	1.000 daN	6	1,00 mm		6 x 120	25
JLKM2530NN	25-30	680	480	1.000 daN	6	1,00 mm		6 x 120	37
JLKM3040NN	30-40	780	550	2.000 daN	8	1,00 mm		8 x 120	48

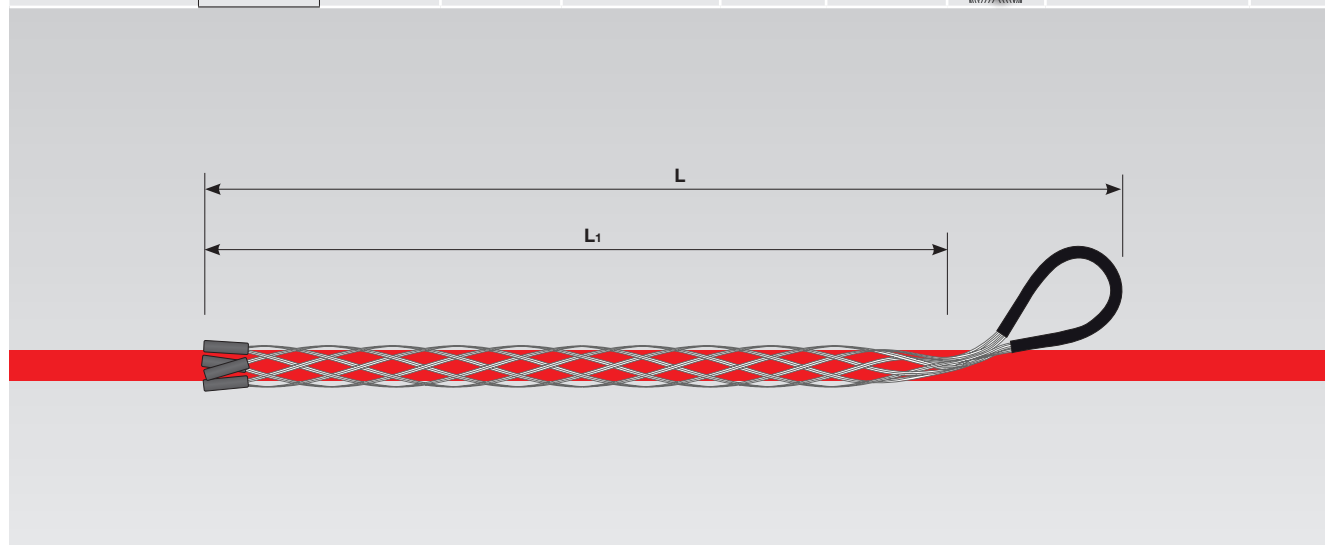

Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Sujeto a variaciones técnicas sin previo aviso. Sujet à des modifications techniques sans préavis. Soggetti a variazioni tecniche senza preavviso